




ACCENT FLOOR HEATING



Accent under tile heating uses a 3.6mm thin element, designed for installation directly below tiles or in a floor levelling screed, to ensure increased efficiency and quick response.

Accent tile heating kits are suitable for installation on concrete, screed and suspended timber sub floors and suitable for under ceramic tiles, slate, porcelain, limestone, marble, terracotta and laminates.

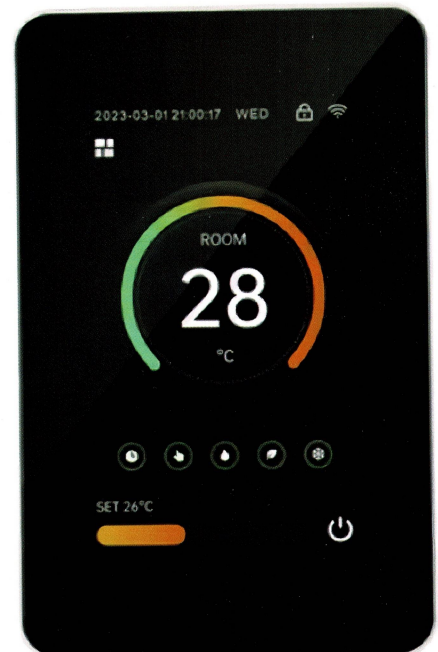

Tile Heating

accentfloorheating.com.au
0430 180 516



ACCENT FLOOR HEATING

General




The Accent tile heater is supplied as a pre-configured roll. Tape hold the cable at a consistent spacing and is protected with a self adhesive fibreglass mesh.

The heaters comes in a range of sizes to cater for rooms of all shapes and sizes. The heaters have a 2.5M long cold tail that connects to the thermostat as a pre-configured roll. Tape holds the cable at consistent spacing and to the protective self adhesive fibreglass mesh.

Installation

Following the recommended layout, unroll the heater, sticking it down in position. To start a new row cut the mesh rotate the roll 90 or 180 degrees.

Care must be taken not to cut or cross over the cables

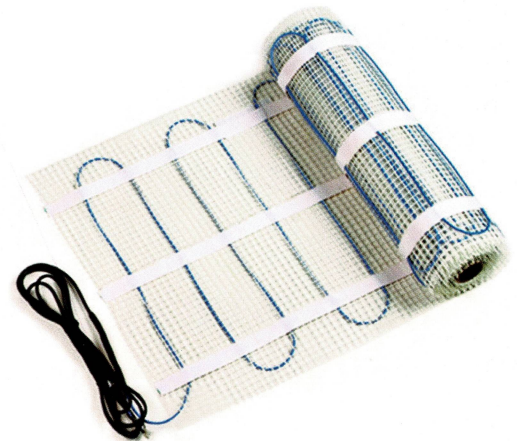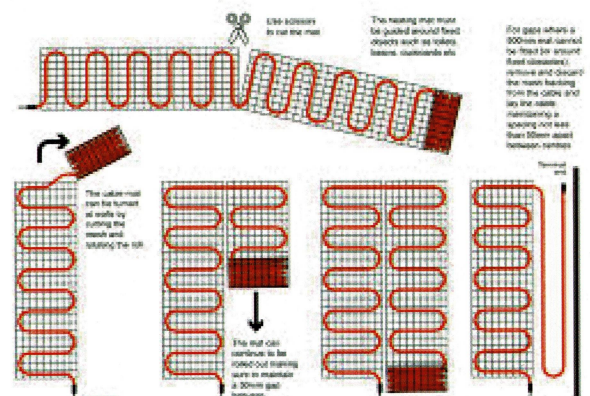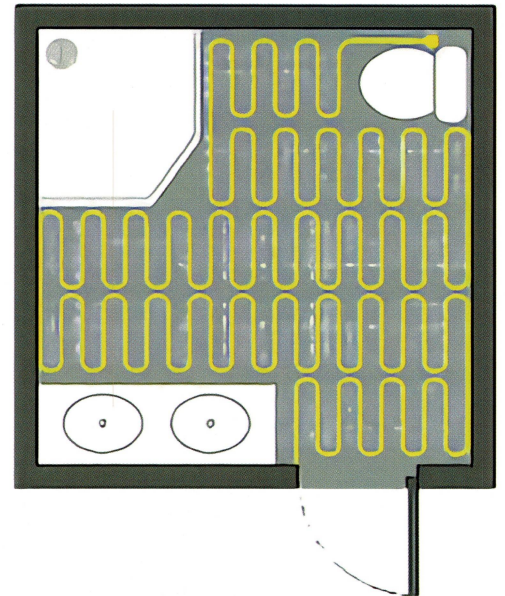

0430 180 516
www.accentfloorheating.com.au
sales@accentfloorheating.com.au

